

Medical 4K Video Recorder

IPS740DS IPS740DG



Record video and capture still images in crystal-clear 4K resolution. IPS740 series recorders come with a rich set of features that will upgrade any medical video application. These recorders also integrate with VACS® software for video archiving and collaboration.

IPS740DS and IPS740DG will simultaneously record files to the internal hard drive and external USB drive. 4 TB of internal storage allows for extended recording times. These models will also record and playback video content in 3D formats.

Use the integrated 5 inch touchscreen on IPS740 series recorders, or switch to an external monitor to control all recording, playback, saving functions, or to preview the active video signal.



Focus on Compatibility

IPS740DS and IPS740DG connect with medical image generating devices, and with patient information systems, to accurately record and store video or captured still images.

Input signal options:


- 3G-SDI (IPS740DS)
- 3G/12G-SDI (IPS740DG)
- DisplayPort 1.2
- HDMI 2.0

File management options:

- DICOM & HL7 Integration
- DICOM Modality Worklist
- DICOM MPPS
- DICOM C-Store
- HL7 Appointment Booking


Additional medical A/V integration options

- Patient search & query
- Medical printer compatible
- Gigabit Ethernet
- 4 x USB 3.0 ports
- Audio inputs/output
- 2 x foot pedal inputs

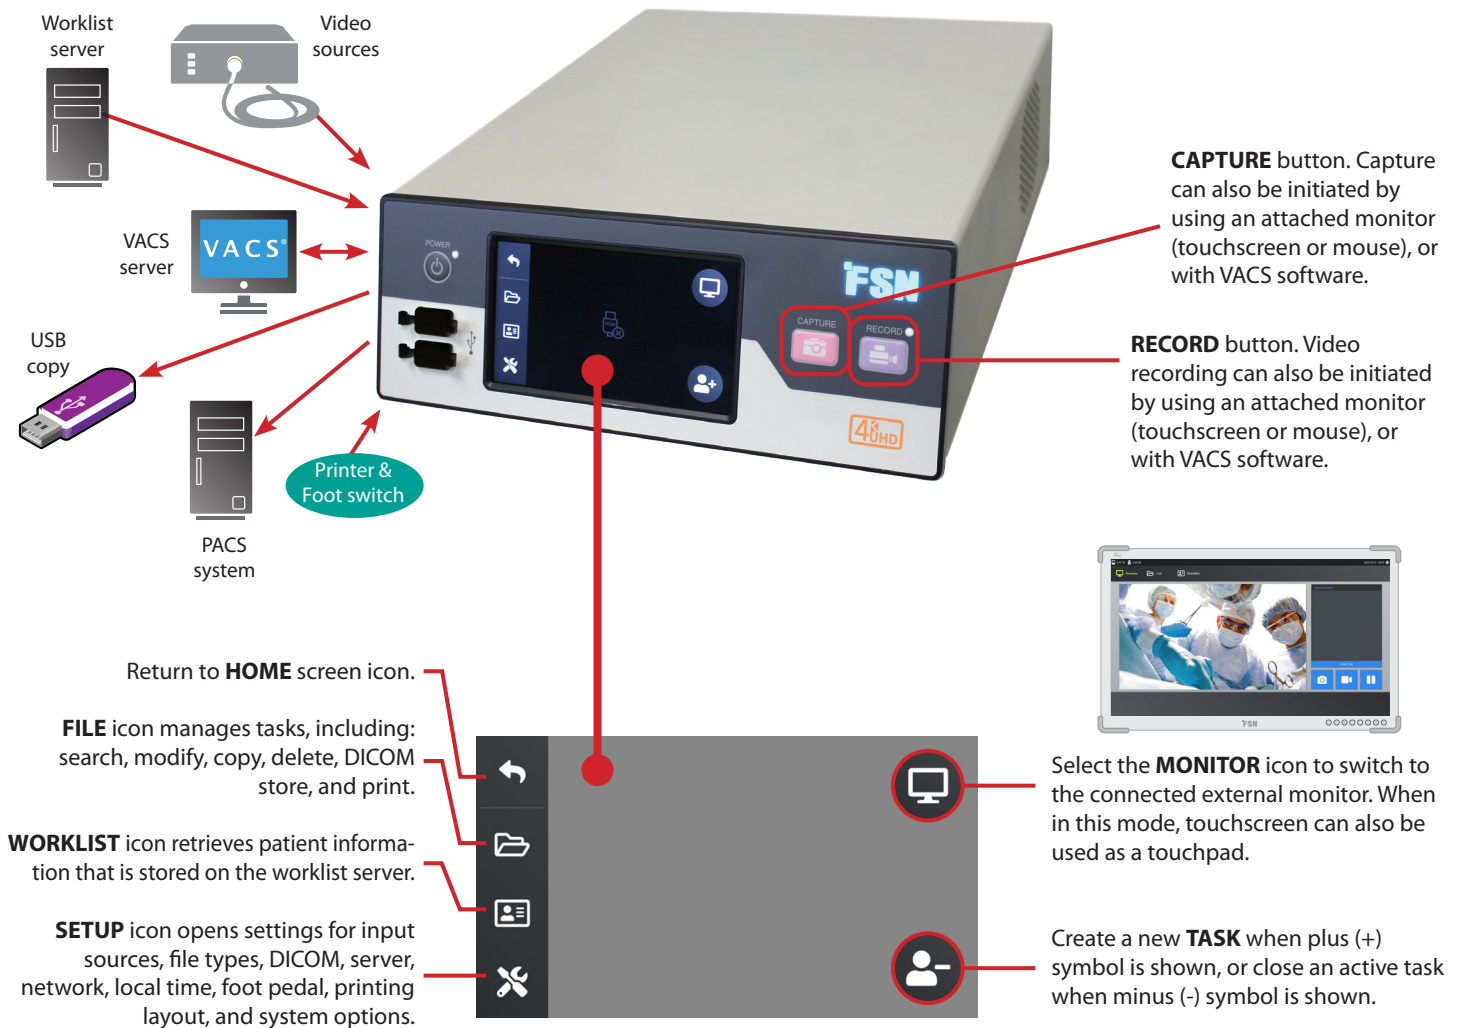

Medical 4K Video Recorder


IPS740DS IPS740DG

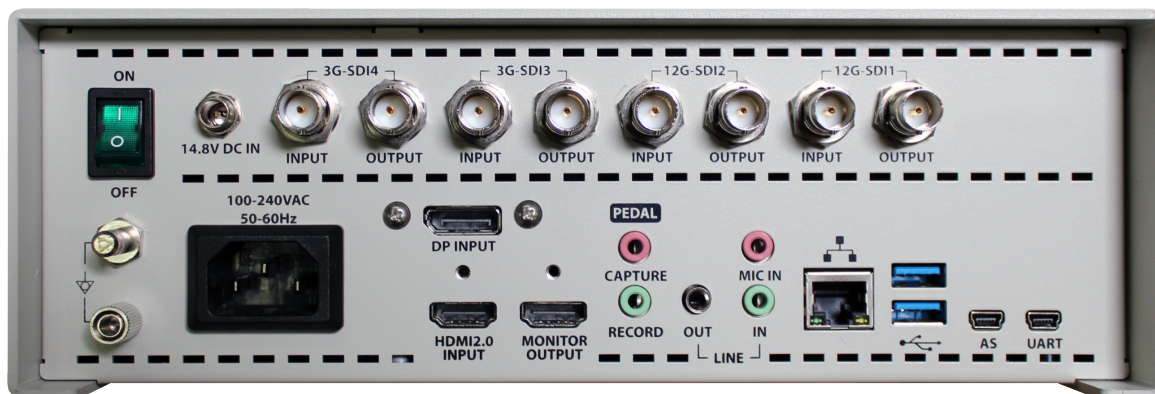

IPS740DG with 3G and 12G-SDI

General Features

Item	Description
Main Functions	Video recording Up to 3840 x 2160P 60Hz 4096 x 2160P 60Hz
	Still image capture Up to 3840 x 2160P 4096 x 2160P
	Standalone preview Front LCD screen
	Menu access Front LCD screen (5 inch touch enabled) GUI on HDMI monitor output.
	DICOM, HL7 DICOM Store (Image) Modality Worklist MPPS Appointment Booking (HL7)
Inputs	DICOM store Direct Access to PACS
	HDMI 2.0
	DisplayPort 1.4
	SDI IPS740DS: 3G-SDI IPS740DG: 12G-SDI, 2SI, Quad
Outputs	Audio 3.5mm Stereo x 2ea Mic in, Line in
	Monitor output HDMI 2.0
	Loop-through IPS740DS: 3G-SDI IPS740DG: 12G-SDI, 2SI, Quad
	Audio 3.5mm Stereo line out

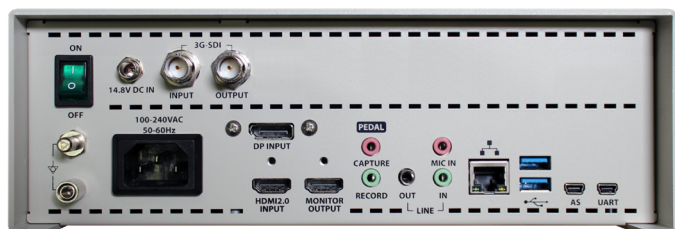

IPS740DS with 3G-SDI

Item	Description
Data I/O	USB 3.0 2 on front, 2 on back
	RS-232C Mini-USB
	Ethernet RJ45 x 1 (10/100/1000M)
	Keyboard / Mouse USB type
	Foot pedal 3.5mm stereo jack x 2 Recording, Capture
Recording and Capture	Recording resolution 4096x2160p60 3840x2160p60 1920x1080p60
	Encoding formats H.264, H.265
	Recording file format MP4
	Capture image format BMP, JPEG, DICOM
	Audio encoding format AAC
Storage	3D video formats 4K line alternative (SBSH conversion) 4K side-by-side half
	Internal hard drive 4TB
	External USB storage USB flash drive USB HDD
	USB file system FAT32, NTFS
	Network file system CIFS
General	Network transfer FTP (client)
	Power requirements AC 100-240V / 50-60Hz, 1.0A - 0.6A (max)
	Power consumption 60W (max)
	Dimensions 260mm (10.2 in.) wide x 95mm (3.7 in.) high x 330mm (13 in.) deep
	Weight IPS740DS: 4.0kg (8.8lbs.) IPS740DG: 4.1kg (9.0lbs.)
Compliance & Certifications	Temperature Operating: 0° to +40° C (+32° to +104° F) Storage: -20° to + 60° C (-4° to +140° F)
	Humidity Operating: 10 - 85% RH Storage: 10 - 85% RH

Specifications are subject to change with or without notice. Doc. # FSN2012 Rev. 2/22

www.fsnmed.com

Foreseeson Custom Displays, Inc.

2210 E. Winston Road
Anaheim, CA 92806 USA
Tel: 714-300-0540
Fax: 714-300-0546

Latin America
Aventura, FL 33180 USA
Tel: 714-507-3855

Foreseeson Korea

404B, PangyoInnovallley B
253 Pangyo-ro
Bundang-gu Seongnam-si
Gyeonggi-do, Korea 463-400
Tel: +82-31-8018-0780
Fax: +82-31-8018-0786

Foreseeson GmbH

Industriestrasse 38a
63150 Heusenstamm, Germany
Tel: +49 6104 64398 0
Fax: +49 6104 64398 11

Foreseeson UK Ltd.

1 Wolsey Road
East Molesey
Surrey
KT8 9EL
United Kingdom
Tel: +44 (0) 208 546 1047

Foreseeson (Shanghai)

Medical Equipment Co., Ltd.
Room 307, 3F
No. 56, 461 Hongcao Road
Caohejing Development District
Xuhui, Shanghai 200233
Tel: 86-21-6113-4188